


# Flo Desk

design Foster + Partners, 2011

release 2019, December



LED light for desk, in varnish coated aluminium and steel.  
Its head rotates by 300° for direct lighting, the arm pivots on base by 120°. 6W-LED which you can switch on with one click for full light intensity, with two clicks for half light intensity.

## Finishing

### Standard

● Black soft touch  
cod. 94001ST00

○ Matt white  
cod. 94002OP00

● Brushed nickel  
cod. 9404400

### Special

● Matt red  
cod. 94003OP00

● Matt yellow  
cod. 94005OP00

● Metallic bronze  
cod. 94029MT00

● Gunmetal  
cod. 9403200

All RAL coating and galvanic finishes available upon request

## Light emission

- Light emission: diffuse
- Light direction: downlight
- Light source: led board
- Source flux: 520 lm
- Emitted flux: 370 lm
- Efficacy: 41 lm/W
- CCT: 3000K
- CRI index: >90
- Lifetime: >55000h L80 @ 25°C

## Electrical Facts



- Source power: 6 W
- Power absorption: 9 W
- Stand-by absorption: < 1 W
- Grid voltage: 100-240V AC/50-60 Hz
- Power supply: multiplug AC-DC converter provided
- Dimmability: internal push dimmer
- Energy class: A++

## Technical data

- Environment: indoor
- Placement: table
- Net weight: 1,7 Kg
- Certifications: CE
- Suggested ambient T: 25°C
- Maximum ambient T: 40°C
- Insulation class: III
- Protection class: IP20

Packaging  
cardboard box  
54 x 46 x 8 (cm)  
0,018 m<sup>3</sup>


Gross weight  
2,6 Kg

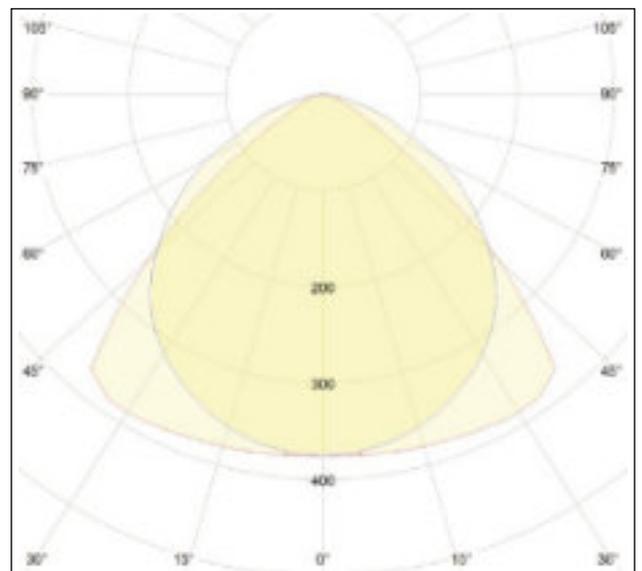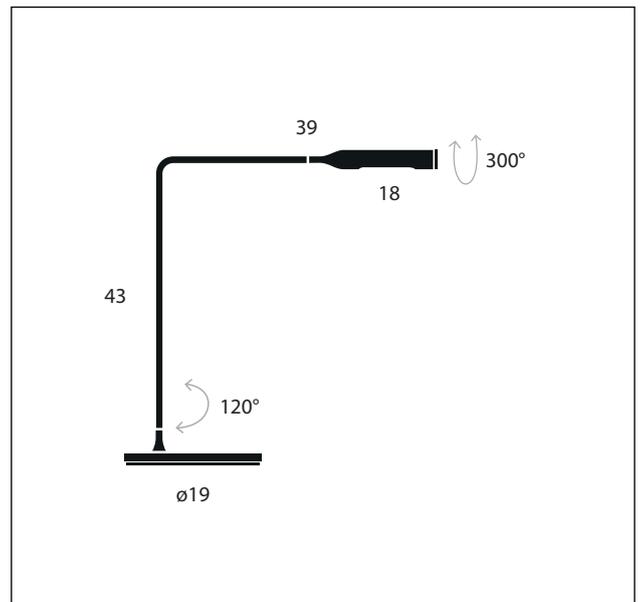

# Flo Desk

design Foster + Partners, 2011

release 2019, December



LED light for desk, in varnish coated aluminium and steel.  
Its head rotates by 300° for direct lighting, the arm pivots on base by 120°. 6W-LED which you can switch on with one click for full light intensity, with two clicks for half light intensity.

## Finishing

### Standard

● Black soft touch  
cod. 94001STK27

○ Matt white  
cod. 94002OPK27

● Brushed nickel  
cod. 94044K27

### Special

● Matt red  
cod. 94003OPK27

● Matt yellow  
cod. 94005OPK27

● Metallic bronze  
cod. 94029MTK27

● Gunmetal  
cod. 94032K27

All RAL coating and galvanic finishes available upon request

## Light emission

- Light emission: diffuse
- Light direction: downlight
- Light source: led board
- Source flux: 500 lm
- Emitted flux: 355 lm
- Efficacy: 39,4 lm/W
- CCT: 2700K
- CRI index: >90
- Lifetime: >55000h L80 @ 25°C

## Electrical Facts



- Source power: 6 W
- Power absorption: 9 W
- Stand-by absorption: < 1 W
- Grid voltage: 100-240V AC/50-60 Hz
- Power supply: multiplug AC-DC converter provided
- Dimmability: internal push dimmer
- Energy class: A++


## Technical data

- Environment: indoor
- Placement: table
- Net weight: 1,7 Kg
- Certifications: CE
- Suggested ambient T: 25°C
- Maximum ambient T: 40°C
- Insulation class: III
- Protection class: IP20

Packaging  
cardboard box  
54 x 46 x 8 (cm)  
0,018 m<sup>3</sup>

Gross weight  
2,6 Kg

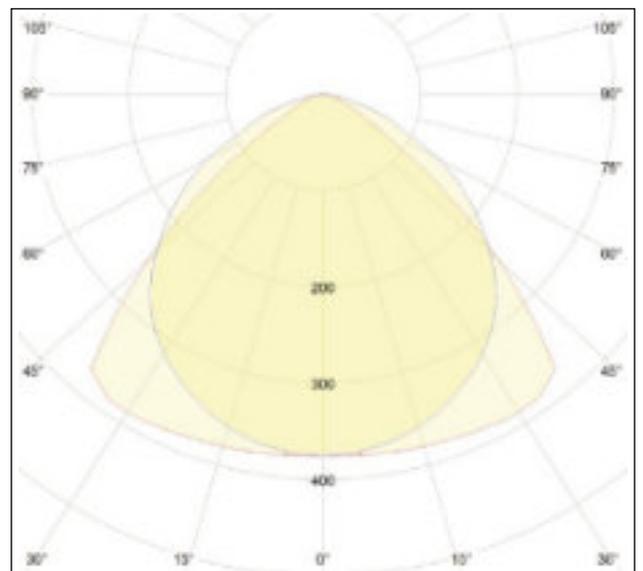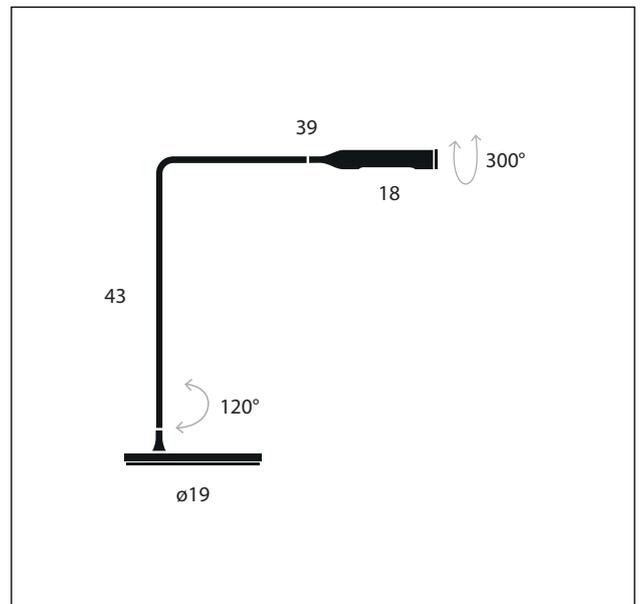



LED light for desk, in varnish coated aluminium and steel.  
Its head rotates by 300° for direct lighting, the arm pivots on base by 120°. 6W-LED which you can switch on with one click for full light intensity, with two clicks for half light intensity.

## Finishing

### Standard

● Black soft touch  
cod. 94001ST00ETL

○ Matt white  
cod. 94002OP00ETL

● Brushed nickel  
cod. 9404400ETL

### Special

● Matt red  
cod. 94003OP00ETL

● Matt yellow  
cod. 94005OP00ETL

● Metallic bronze  
cod. 94029MT00ETL

● Gunmetal  
cod. 9403200ETL

All RAL coating and galvanic finishes available upon request

## Light emission



- Light emission: diffuse
- Light direction: downlight
- Light source: led board
- Source flux: 520 lm
- Emitted flux: 370 lm
- Efficacy: 41 lm/W
- CCT: 3000K
- CRI index: >90
- Lifetime: >55000h L80 @ 25°C

## Electrical Facts

- Source power: 6 W
- Power absorption: 9 W
- Stand-by absorption: < 1 W
- Grid voltage: 100-240V AC/50-60 Hz
- Power supply: multiplug AC-DC converter provided
- Dimmability: internal push dimmer
- Energy class: A++

## Technical data

- Environment: indoor
- Placement: table
- Net weight: 1,7 Kg
- Certifications: ETL
- Suggested ambient T: 25°C
- Maximum ambient T: 40°C
- Insulation class: III
- Protection class: IP20

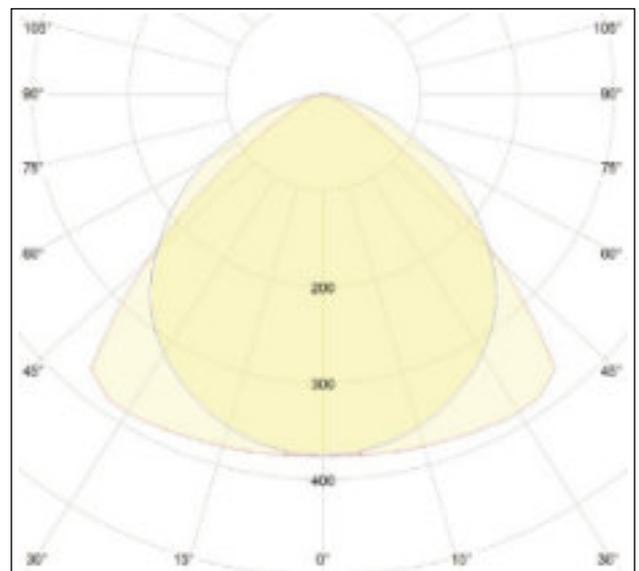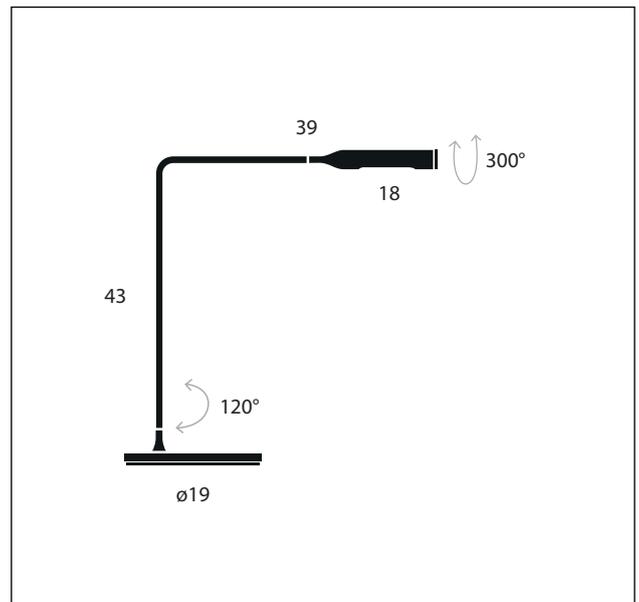


Packaging  
cardboard box  
54 x 46 x 8 (cm)  
0,018 m<sup>3</sup>

Gross weight  
2,6 Kg

# Flo Desk

design Foster + Partners, 2011

release 2019, December



LED light for desk, in varnish coated aluminium and steel.  
Its head rotates by 300° for direct lighting, the arm pivots on base by 120°. 6W-LED which you can switch on with one click for full light intensity, with two clicks for half light intensity.

## Finishing

### Standard

● Black soft touch  
cod. 94001STK27ETL

○ Matt white  
cod. 94002OPK27ETL

● Brushed nickel  
cod. 94044K27ETL

### Special

● Matt red  
cod. 94003OPK27ETL

● Matt yellow  
cod. 94005OPK27ETL

● Metallic bronze  
cod. 94029MTK27ETL

● Gunmetal  
cod. 94032K27ETL

All RAL coating and galvanic finishes available upon request

## Light emission

- Light emission: diffuse
- Light direction: downlight
- Light source: led board
- Source flux: 500 lm
- Emitted flux: 355 lm
- Efficacy: 39,4 lm/W
- CCT: 2700K
- CRI index: >90
- Lifetime: >55000h L80 @ 25°C

## Electrical Facts

- Source power: 6 W
- Power absorption: 9 W
- Stand-by absorption: < 1 W
- Grid voltage: 100-240V AC/50-60 Hz
- Power supply: multiplug AC-DC converter provided
- Dimmability: internal push dimmer
- Energy class: A++

## Technical data

- Environment: indoor
- Placement: table
- Net weight: 1,7 Kg
- Certifications: ETL
- Suggested ambient T: 25°C
- Maximum ambient T: 40°C
- Insulation class: III
- Protection class: IP20

Packaging  
cardboard box  
54 x 46 x 8 (cm)  
0,018 m<sup>3</sup>

Gross weight  
2,6 Kg

