

Tolomeo Mini Table LED 3000K



DESIGN BY:

Michele De Lucchi , Giancarlo Fassina 2010


MATERIALS:

aluminium, steel

DESCRIPTION:

Using Led technology, the attention must be focused not only on energy consumption and light efficiency, but above all on the quality and quantity of the distribution of the light. In fact the advantage of the Led is that it emits 100% light fl ow into the direct hemisphere, eliminating dispersion and waste in other directions. This means that in order to obtain illuminance of 1250 lux on the work surface, with an incandescent light source a power of 100W is necessary, while with a Led source 10W is sufficient, with a 90% energy saving. Base and cantilevered arms in polished aluminium; diffuser in matt anodised aluminum; joints and supports in polished aluminium. System of spring balancing. 5 direct Led. The code is referred to the body lamp only

Interchangeable support: table base, clamp, desk fixed support and twin support that allows two indipendent lamp units to be fitted.



Light emission





TECHNICAL DATA SHEET

FEATURES
Product name:

Tolomeo Mini Table LED

3000K
Article Code: A005600
Colour: Aluminium
Material: aluminium, steel

Series: Design

DIMENSIONS

Length:cm 68Height:cm 54Base Diameter:cm 20Max Extension Height:cm 108Max Extension Length:cm 102Impact Resistance:N/DGlow Wire Test:N/D °

LAMPS INCLUDED

 Category:
 LED COB

 Number:
 1

 Watt:
 10W

 Color temperature (K):
 3000 K

 Class:
 A

LUMINAIR

 Watt:
 10W

 Voltage:
 24V

 Luminous Flux (Im):
 593lm

 CCT:
 3000K

 Efficiency:
 70%

 Efficacy:
 59lm/W

 CRI:
 90

Dimmer Typology: Microswitch Dimmer

DIMENSIONS







TOLOMEO SUPP.TAVOLO FISSO A004200




TOLOMEO MORSETTO A004100




TOLOMEO BASE D 200 ALL A008600

DIAGRAMS

Polar curve

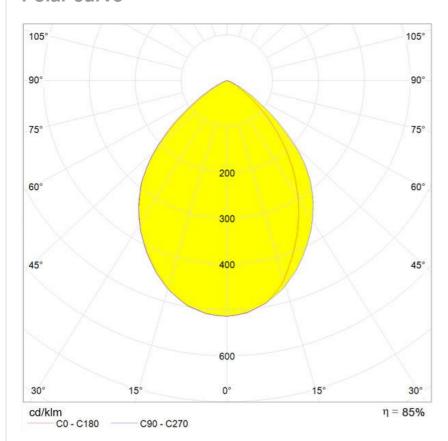

Cartesian diagram

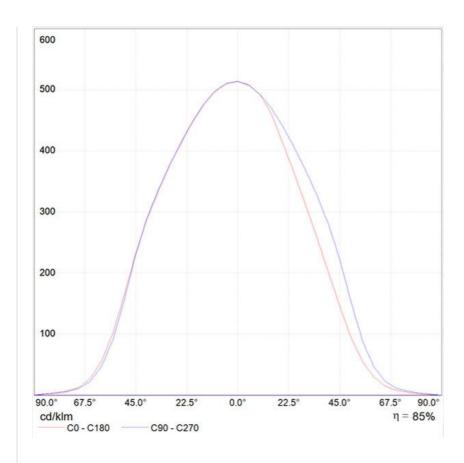



Tolomeo Mini Table - Aluminum



DESIGN BY:

Michele De Lucchi, Giancarlo Fassina 1987


MATERIALS:

aluminium, steel


DESCRIPTION:

Base and cantilevered arms in polished aluminium; diffuser in matt anodised aluminium; joints and supports in polished aluminium. System of spring balancing. The code is referred to the body lamp only

Interchangeable support: table base, clamp, desk fixed support and twin support that allows two indipendent lamp units to be fitted. Possibility to mount LED source on E27 Socket



Light emission



TECHNICAL DATA SHEET

FEATURES

Colour:

Product name: Tolomeo Mini Table -


Aluminum Article Code: A005910 Aluminium

Material: aluminium, steel Series: Design

DIMENSIONS

Length: cm 68 Height: cm 54 Base Diameter: cm 20 Max Extension Height: cm 108 Max Extension Length: cm 102 Impact Resistance: N/D Glow Wire Test: N/D °

DIMENSIONS



COLOUR



LAMPS NOT INCLUDED

HALO Category: Number: A60 Lbs: Watt: 77W Socket: E27 Luminous Flux (Im): 1320lm Colour Rendering: 2900K Colour temperature (K): Duration (h): 1000h

ALTERNATIVE LAMPS

LED

LED Category: Watt: 8W Socket: E27 Class: Α

LUMINAIR

Watt: 77W Voltage: 220V-240V Luminous Flux (Im): 1180lm CCT: 2900K

AWARDS



_ 1989 Compasso d'Oro / A.D.I. Milano (Italia) _ 1987 SNAI Oscar des Architectes d'Intérieur Paris (France) _ 1987 Haus Industrieform Deutschland

ACCESSORIES







TOLOMEO MORSETTO A004100



TOLOMEO BASE D 200 ALL A008600



Tolomeo Mini Table LED 2700K with MD



DESIGN BY:

Michele De Lucchi , Giancarlo Fassina 2010


MATERIALS:

aluminium, steel

DESCRIPTION:

Using Led technology, the attention must be focused not only on energy consumption and light efficiency, but above all on the quality and quantity of the distribution of the light. In fact the advantage of the Led is that it emits 100% light fl ow into the direct hemisphere, eliminating dispersion and waste in other directions. This means that in order to obtain illuminance of 1250 lux on the work surface, with an incandescent light source a power of 100W is necessary, while with a Led source 10W is sufficient, with a 90% energy saving. Base and cantilevered arms in polished aluminium; diffuser in matt anodised aluminum; joints and supports in polished aluminium. System of spring balancing. 5 direct Led. The code is referred to the body lamp only

Interchangeable support: table base, clamp, desk fixed support and twin support that allows two indipendent lamp units to be fitted.



Light emission





TECHNICAL DATA SHEET

FEATURES
Product name: Tolomeo Mini Table LED

2700K with MD
Article Code: A0055W00
Colour: Aluminium
Material: aluminium, steel
Series: Design

DIMENSIONS

Length:cm 68Height:cm 54Base Diameter:cm 20Max Extension Height:cm 108Max Extension Length:cm 102Glow Wire Test:750 °

LAMPS INCLUDED

 Category:
 LED COB

 Number:
 1

 Watt:
 10W

 Color temperature (K):
 2700K

 Class:
 A

LUMINAIR

 Watt:
 10W

 Voltage:
 24V

 Luminous Flux (Im):
 593lm

 CCT:
 2700K

 Efficiency:
 70%

 Efficacy:
 59lm/W

 CRI:
 90

Dimmer Typology: Microswitch Dimmer

DIMENSIONS







TOLOMEO SUPP.TAVOLO FISSO A004200




TOLOMEO MORSETTO A004100




TOLOMEO BASE D 200 ALL

DIAGRAMS

Polar curve

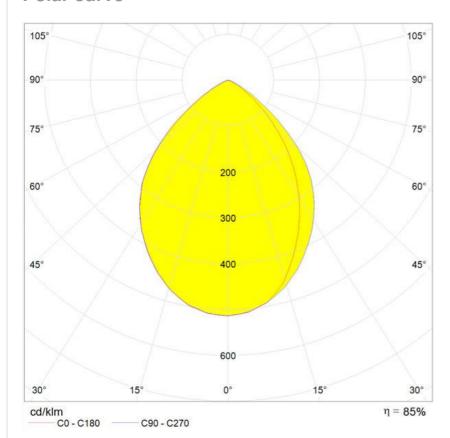

Cartesian diagram

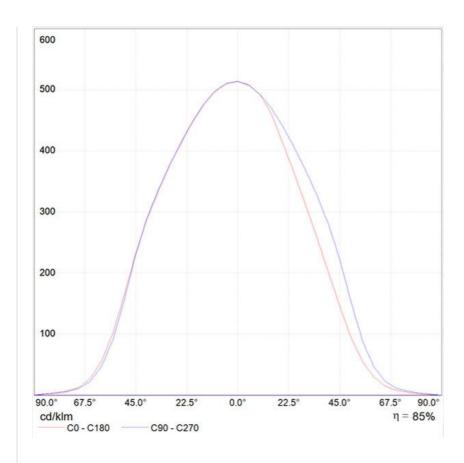



Tolomeo Mini Table LED 2700K



DESIGN BY:

Michele De Lucchi , Giancarlo Fassina 2010


MATERIALS:

aluminium, steel

DESCRIPTION:

Using Led technology, the attention must be focused not only on energy consumption and light efficiency, but above all on the quality and quantity of the distribution of the light. In fact the advantage of the Led is that it emits 100% light fl ow into the direct hemisphere, eliminating dispersion and waste in other directions. This means that in order to obtain illuminance of 1250 lux on the work surface, with an incandescent light source a power of 100W is necessary, while with a Led source 10W is sufficient, with a 90% energy saving. Base and cantilevered arms in polished aluminium; diffuser in matt anodised aluminum; joints and supports in polished aluminium. System of spring balancing. 5 direct Led. The code is referred to the body lamp only

Interchangeable support: table base, clamp, desk fixed support and twin support that allows two indipendent lamp units to be fitted.



Light emission





TECHNICAL DATA SHEET

FEATURES

Product name: Tolomeo Mini Table LED

2700K
Article Code: A0056W00
Colour: Aluminium
Material: aluminium, steel

Series: Design

DIMENSIONS

Length:cm 68Height:cm 54Base Diameter:cm 20Max Extension Height:cm 108Max Extension Length:cm 102Impact Resistance:N/DGlow Wire Test:N/D °

LAMPS INCLUDED

 Category:
 LED COB

 Number:
 1

 Watt:
 10W

 Color temperature (K):
 2700K

 Class:
 A

LUMINAIR

 Watt:
 10W

 Voltage:
 24V

 Luminous Flux (Im):
 593lm

 CCT:
 2700K


 Efficiency:
 70%

 Efficacy:
 59lm/W

 CRI:
 90

Dimmer Typology: Microswitch Dimmer

DIMENSIONS







TOLOMEO SUPP.TAVOLO FISSO A004200



TOLOMEO MORSETTO A004100



TOLOMEO BASE D 200 ALL A008600



Tolomeo Mini Table LED 3000K with MD



DESIGN BY:

Michele De Lucchi , Giancarlo Fassina 2010


MATERIALS:

aluminium, steel

DESCRIPTION:

Using Led technology, the attention must be focused not only on energy consumption and light efficiency, but above all on the quality and quantity of the distribution of the light. In fact the advantage of the Led is that it emits 100% light fl ow into the direct hemisphere, eliminating dispersion and waste in other directions. This means that in order to obtain illuminance of 1250 lux on the work surface, with an incandescent light source a power of 100W is necessary, while with a Led source 10W is sufficient, with a 90% energy saving. Base and cantilevered arms in polished aluminium; diffuser in matt anodised aluminum; joints and supports in polished aluminium. System of spring balancing. 5 direct Led. The code is referred to the body lamp only

Interchangeable support: table base, clamp, desk fixed support and twin support that allows two indipendent lamp units to be fitted.



Light emission





TECHNICAL DATA SHEET

Product name: Tolomeo Mini Table LED

3000K with MD
Article Code: A005500
Colour: Aluminium
Material: aluminium, steel

Series: Design

DIMENSIONS

FEATURES

 Length:
 cm 68

 Height:
 cm 54

 Base Diameter:
 cm 20

 Max Extension Height:
 cm 108

 Max Extension Length:
 cm 102

 Glow Wire Test:
 750 °

LAMPS INCLUDED

 Category:
 LED COB

 Number:
 1

 Watt:
 10W

 Color temperature (K):
 3000 K

 Class:
 A

LUMINAIR

 Watt:
 10W

 Voltage:
 24V

 Luminous Flux (Im):
 593lm

 CCT:
 3000K

 Efficiency:
 70%

 Efficacy:
 59lm/W

 CRI:
 90

Dimmer Typology: Microswitch Dimmer

DIMENSIONS







TOLOMEO SUPP.TAVOLO FISSO A004200




TOLOMEO MORSETTO A004100



TOLOMEO BASE D 200 ALL

DIAGRAMS

Polar curve

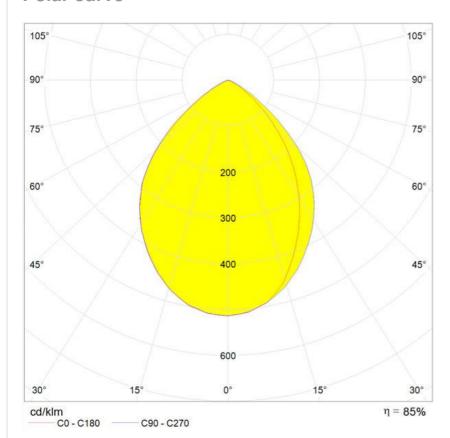

Cartesian diagram

