

PC TABLE LAMP

DESIGN BY PIERRE CHARPIN



Pierre Charpin's PC Table Lamps is a collection of refined freestanding tabletop lamps. The lamps are constructed in anodised aluminium, which makes the surface more resistant to corrosion. The light source is hidden from view by a removable polycarbonate moulded diffuser, creating both a soft directional downlight effect and determining the form of the lamp itself. The PC Table Lamps are available in a variety of sizes and colours, and are suitable for both contract and domestic markets.

PRODUCT DETAILS

- / Part of a progressive and technologically advanced lighting collection.
- / A family of refined pendants, task lights, table and portable lamps.
- / CE approved.
- / Designed for use with a replaceable standard retro fit LED dimmable bulb.
- / Touch step dimmer.
- / Table lamp suitable for both private and office environments.
- / Qualified for contract use.

HAY

MATERIALS

SHADE / Anodised spun aluminium shade.

BASE / Anodised extruded aluminium base with a cast iron internal weight.

DIFFUSER / Injection moulded translucent polycarbonate diffuser.

CABLE / Braided textile cable with PVC insulation.
Please note that the cable is black for all colour options.

COLOUR & FINISH

Please note that the colour codes are indicative.

Available in 2 different colours.
/ Soft black anodised (RAL 9004)
/ Aluminium anodised



SOFT BLACK



ALUMINIUM

DIMENSIONS

SMALL

WIDTH / 25 cm / 9.8"

DEPTH / 25 cm / 9.8"



HEIGHT / 33 cm / 13"

LARGE

WIDTH / 40 cm / 15.7"

DEPTH / 40 cm / 15.7"

HEIGHT / 50 cm / 19.7"

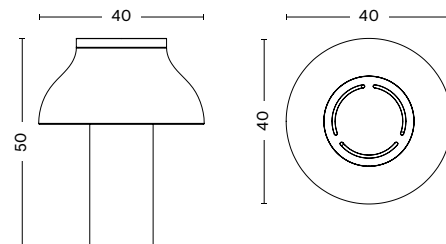

TECHNICAL SPECIFICATIONS

SMALL

- / RECOMMENDED LIGHT SOURCE* / LED E27 (A19) (globe styles are not recommended)
- / POWER (watts) / 10-13W
- / DIMMABLE / Yes
- / POWER SUPPLY / 220-240V AC at 50/60Hz EU plug mounted (UK adaptor included)
- / CORD LENGTH / 200 cm
- / SWITCH / Touch step dimmer (entire base of lamp)

*Bulb not included.

TEST SPECIFICATIONS*

- / FLUX (lumens) / 1000-1500lm
- / CCT (kelvin) / 2700-3000k, warm white
- / CRI (1-100) / 80

*Photometrics and the specification shown is taken using the recommended LED E27 bulb fitted in the production luminaire.

CERTIFICATIONS


- / CE approved: this product has been assessed and complies with the essential requirements of the relevant European directives.



Tested according to the following European EN / IEC standards which relate specifically to electrical lighting products including:

- / EN 55015:2013 (radio disturbance)
- / EN 61547:2009 (EMC immunity)
- / EN 61000-3-2:2014 (EMC compatibility)
- / EN 61000-3-3:2013 (EMC compatibility)
- / EN 60598-2-4:1997 (portable luminaires)
- / EN 60598-1:2015 (general requirements)
- / EN 62493:2010 (human exposure to EMC)

PHOTOMETRICS

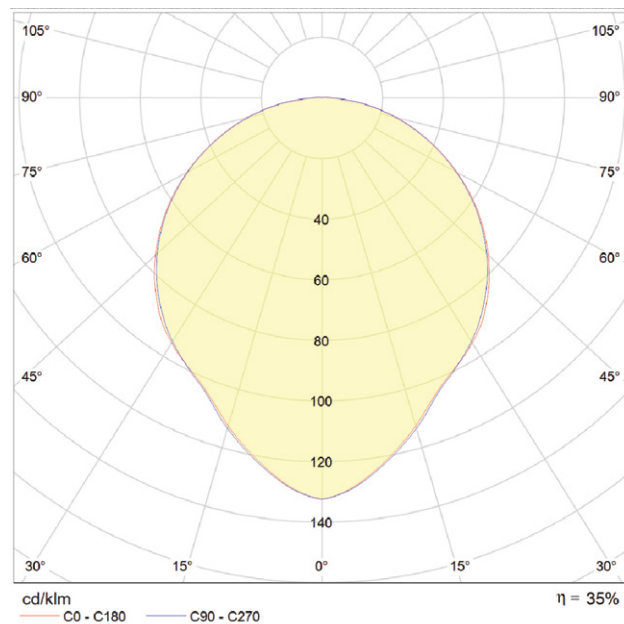

DOWNLOADS

2D files, 3D files and packshots are available in our imagebank at hay.com.

Care and maintenance instructions and CE attestation of conformity certificates are available at hay.com.

An overview of the complete HAY lighting collection and accessories, can be found at hay.dk/en/contract/products/lighting/

TECHNICAL SPECIFICATIONS

LARGE

- / RECOMMENDED LIGHT SOURCE* / LED E27 (A19) (globe styles are not recommended)
- / POWER (watts) / 10-13W
- / DIMMABLE / Yes
- / POWER SUPPLY / 220-240V AC at 50/60Hz EU plug mounted (UK adaptor included)
- / CORD LENGTH / 200 cm
- / SWITCH / Touch step dimmer (entire base of lamp)

*Bulb not included.

TEST SPECIFICATIONS*

- / FLUX (lumens) / 1000-1500lm
- / CCT (kelvin) / 2700-3000k, warm white
- / CRI (1-100) / 80

*Photometrics and the specification shown is taken using the recommended LED E27 bulb fitted in the production luminaire.

CERTIFICATIONS


/ CE approved: this product has been assessed and complies with the essential requirements of the relevant European directives.



Tested according to the following European EN / IEC standards which relate specifically to electrical lighting products including:

- / EN 55015:2013 (radio disturbance)
- / EN 61547:2009 (EMC immunity)
- / EN 61000-3-2:2014 (EMC compatibility)
- / EN 61000-3-3:2013 (EMC compatibility)
- / EN 60598-2-4:1997 (portable luminaires)
- / EN 60598-1:2015 (general requirements)
- / EN 62493:2010 (human exposure to EMC)

PHOTOMETRICS

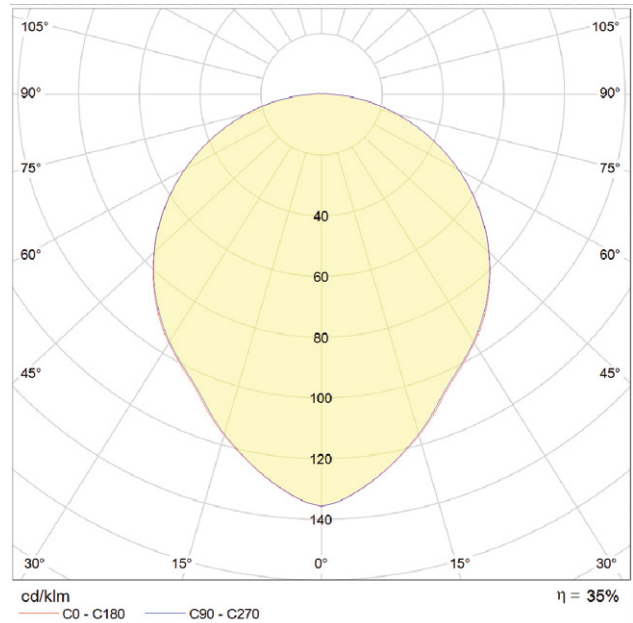

DOWNLOADS

2D files, 3D files and packshots are available in our imagebank at hay.com.

Care and maintenance instructions and CE attestation of conformity certificates are available at hay.com.

An overview of the complete HAY lighting collection and accessories, can be found at hay.dk/en/contract/products/lighting.

HAY