

NOC WALL

DESIGN BY SMITHMATTHIAS



Noc Wall is an adaptable die-cast aluminium wall light with a faceted shade and a smooth powder coat finish. The rotating mechanism provides two points of adjustment and the main light is fixed into the wall-mounted bracket allowing the cable to hang freely from the light to be plugged into a wall socket. Noc Wall is a versatile light for everyday use in both domestic and commercial settings. It is supplied with a bulb and a two-metre cable with inline switch. Noc Wall is available in dark grey and off white.

PRODUCT DETAILS

- / Part of a progressive and technologically advanced lighting collection.
- / A flexible, engineered clip light with character.
- / CE approved.
- / Supplied with a replaceable standard E14 LED bulb with an estimated life span of 25.000 hours of use.
- / Available in two variants; with touch sensitive button and integrated cable or with external cable and inline switch.
- / Suitable for both private and office environments.
- / Qualified for contract use.
- / For indoor use only.

HAY

MATERIAL

LAMP STEM AND BASE / Machined aluminum.

LAMP SHADE / Die cast aluminum.

CORD / Silicone cable.

Please note that the cable is black for the dark grey version and white for the off white version.

COLOUR & FINISH

Please note that the colour codes are indicative.

Available in 2 different colours.

/ Dark grey (RAL 7016)

/ Off white (Pantone 1C)



DIMENSIONS

WALL

WIDTH / 11 cm / 4.3"

DEPTH / 22 cm / 8.7"


HEIGHT / 14 cm / 5.5"

WALL BUTTON

WIDTH / 11,8 cm / 4.6"

DEPTH / 22 cm / 8.7"

HEIGHT / 14 cm / 5.5"

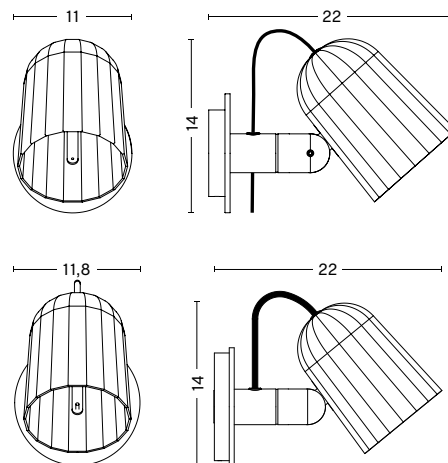

TECHNICAL SPECIFICATIONS

/ LIGHT SOURCE* / LED E14 (A15)
/ POWER (watts) / 5,5W
/ DIMMABLE / No
/ POWER SUPPLY / 220-240V AC at 50-60Hz
/ CORD LENGTH / 200 cm / N/A on Noc Wall Button
/ SWITCH / Inline Switch / Integrated switch on Noc Wall Button

*Bulb included.

TEST SPECIFICATIONS*

/ FLUX (lumens) / 470lm
/ CCT (kelvin) / 2800k, warm white
/ CRI (1-100) / 85

*Photometrics and the specification shown is taken using the included LED bulb fitted in the production luminaire.

CERTIFICATIONS


/ CE approved: This product has been assessed and complies with the essential requirements of the relevant European directives.



Tested according to the following European EN / IEC standards which relate specifically to electrical lighting products including:

/ EN 55015:2013 (radio disturbance)
/ EN 61547:2009 (EMC immunity)
/ EN 61000-3-2:2014 (EMC compatibility)
/ EN 61000-3-3:2013 (EMC compatibility)
/ EN 60598-2-4:1997 (portable luminaires)
/ EN 60598-1:2015 (general requirements)
/ EN 62493:2010 (human exposure to EMC)

PHOTOMETRICS

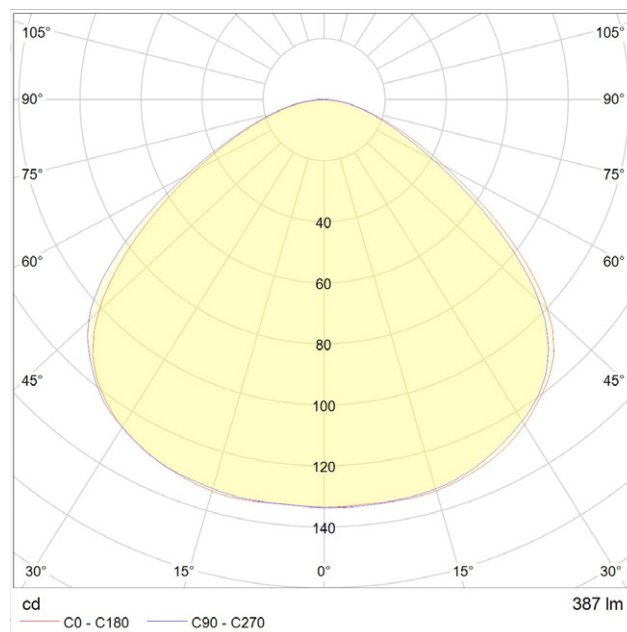

DOWNLOADS

2D files, 3D files and packshots are available in our imagebank at hay.com.

Care and maintenance instructions and CE attestation of conformity certificates are available at hay.com.

An overview of the complete HAY lighting collection and accessories, can be found at hay.dk/en/contract/products/lighting.

HAY